| Part no. | 3X6M PVC | Quantity |
|---|---|---|
| 1 Frame pole | | 8 |
| 2 Frame pole | | 9 |
| 3 Support pole | | 8 |
| 4 connector | | 6 |
| 5 connector | | 6 |
| Spring button | | 42 |
| Long bungee ball | | 80 |
| Small bungee ball | | 14 |
| Guy line | | 4 |
| 8x300mm Peg | | 4 |
| 6x180mm peg | | 8 |
| 4x180mm peg | | 31 |
| Hook | | 8 |
| Roof | | 1 |
| Sidewall | | 6 |
| End wall | | 2 |
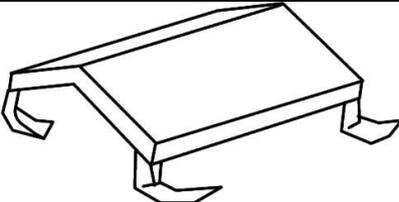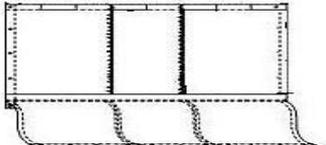
# I

Select a flat ground for the tent, unpack the carton and check all the parts including tubes, tent and accessories… etc. are present as same as list.

Assemble the framework of rooftop by joining the portion (4.5) together with poles (1.2).

To ensure the screw fixed to every pole tightly .
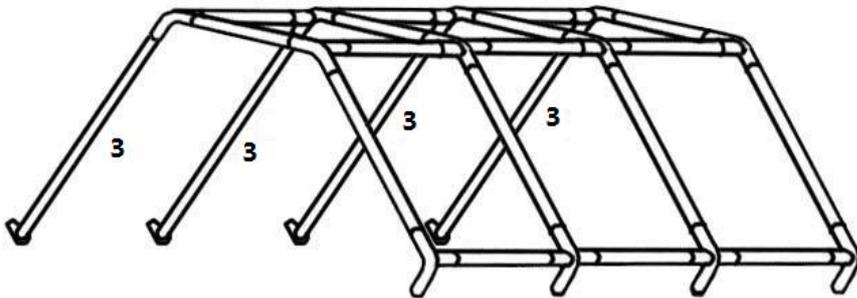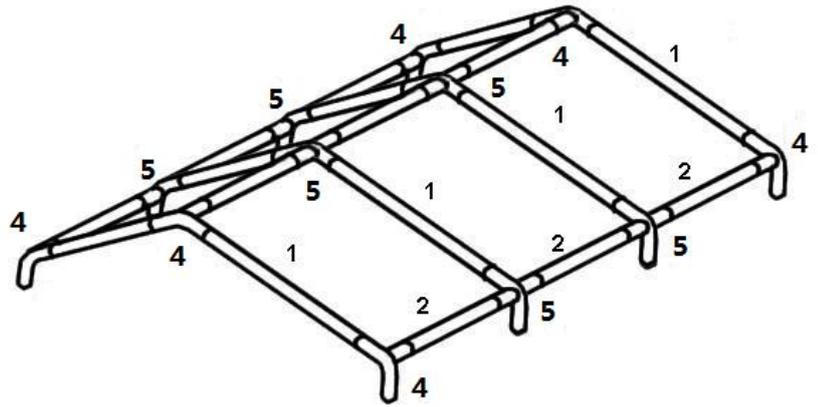
**II** Attach one end of supported pole (3) to the joints (4,5)

# III

Cover the roof on the frame ,and attach it by the bungee balls properly ,take care of the tension of the bungee balls ,for if you use too many on one side of tent ,it may too tight to tie the other side of it .

bungee ball
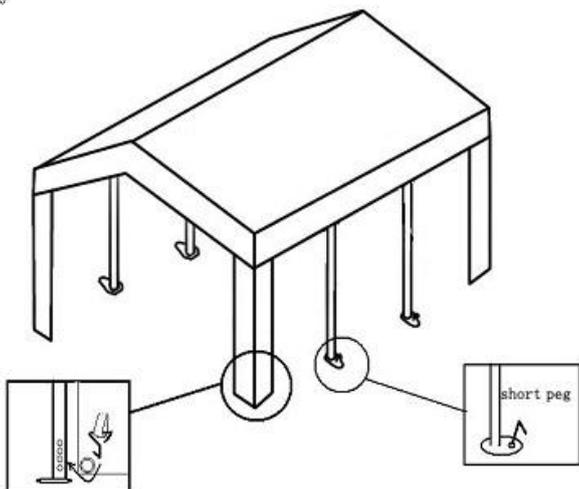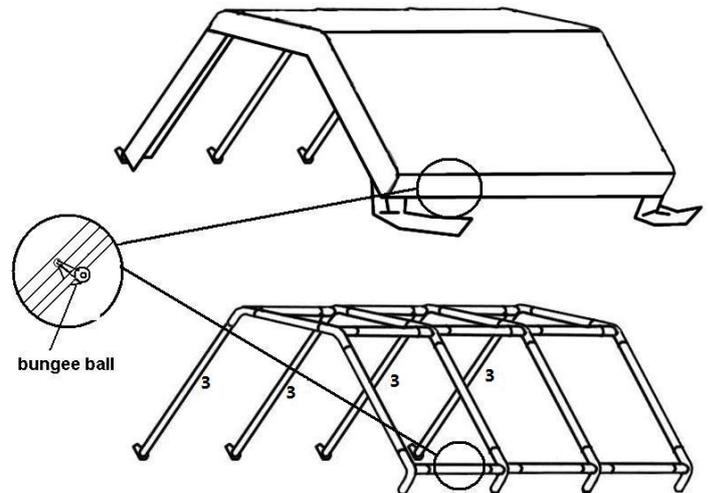
**IV** Attach the another 4 supported poles (3) to the joints (4,5), built-up the framework ,use the 6x180mm peg to fix each pole into the ground and use the hook to fix the leg cover to the

short peg

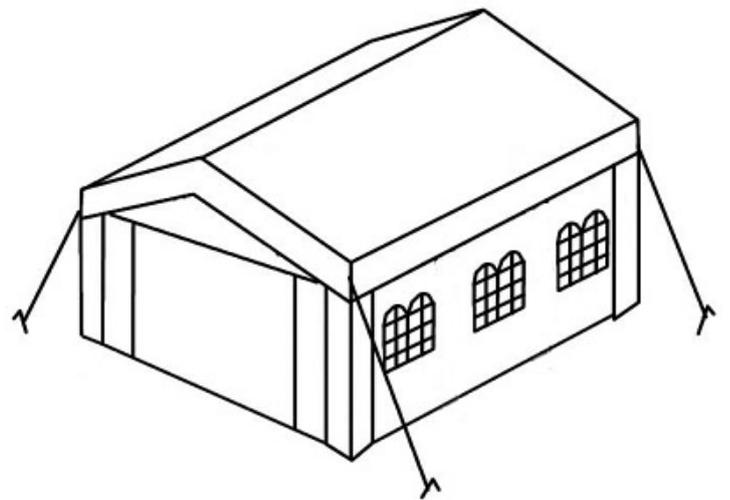**V.** Spread the wall panel and door panel attach to framework by using the bangee cords clasping the frame to grommets that is construct over the wall panel and door panel to ensure stability. Also use the short pegs to fix the doors to the ground. .



bungee ball
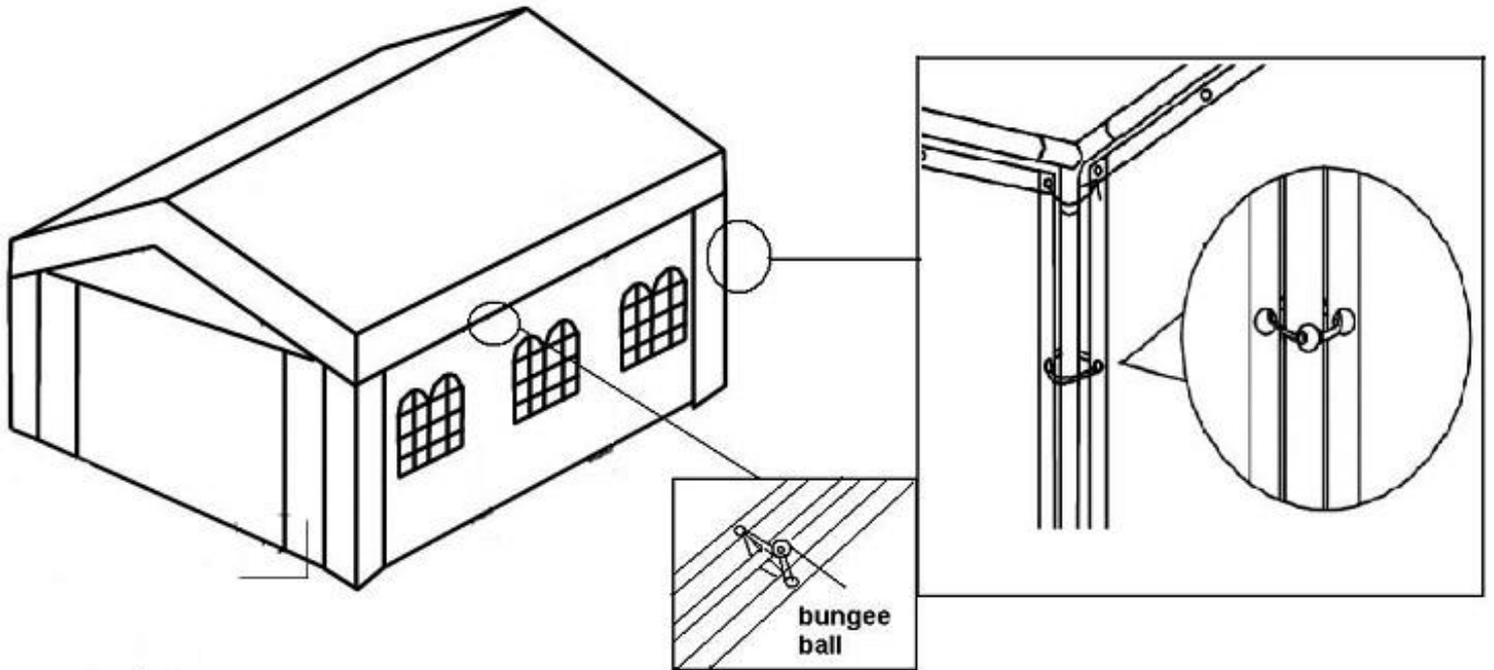
**VI** The Guy lines clasp to each corner of tent and another end of line fix to ground by pegs 8x300mm



. **Warning**
1. Take note that the tent needs to be handled carefully to avoid damage.
2. Do not force the frame as they may be damage in the process.
3. Tents are meant as temporary shelter and must be evacuated under extreme weather conditions.
4. Please select a suitable site for the tent to avoid the damage to underground sprinkler systems, water, gas or electrical lines.